


ROBOTIC STRETCH WRAPPING MACHINE




CAN WORK CONTINUOUSLY FOR 8 HOURS,
AUTOMATICALLY DETECT THE HEIGHT OF THE OUTER
PACKAGING, CAN BE PRESET TO DIFFERENT PACKAGING MODES

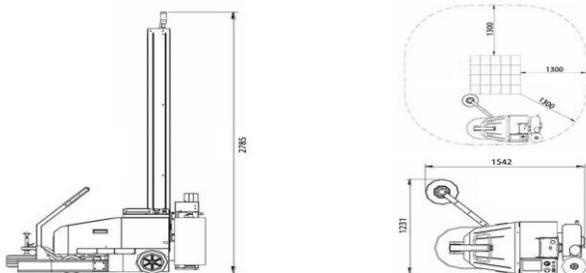

LAYOUT SIZE DRAWING (MM)

CAN WORK CONTINUOUSLY FOR 8 HOURS
PLC AND TOUCH SCREEN CONTROL, WINDING PARAMETERS CAN BE SET
PHOTOELECTRIC SWITCH, SELF-DYNAMIC MEASUREMENT OF CARGO HEIGHT
WITH SWITCH PROTECTION DEVICE AND EMERGENCY STOP SWITCH DEVICE
REINFORCE THE WINDING FUNCTION TO PROVIDE SPECIAL PROTECTION FOR CERTAIN
PARTS

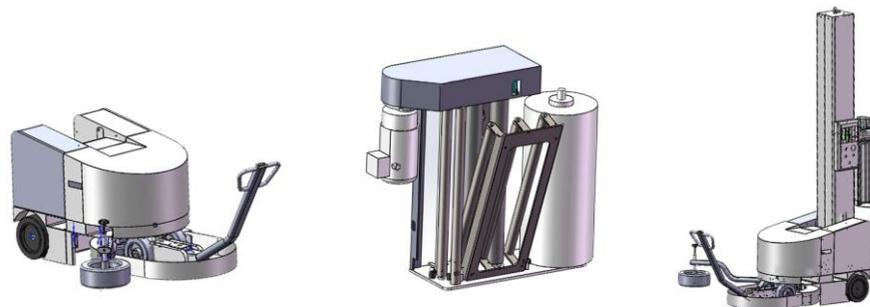

AUTOMATICALLY DETECT THE HEIGHT OF THE OUTER PACKAGING

Item	Unit	Parameter
Min pallet size:	mm	(L)600*(W)600
Max pallet size:		no limited
Max packing height:	mm	(H)2400
Max packing weight:		no limited
Max moving speed:	meters/min	70
Charge power:	v	1PH AC220V, 50/60Hz, 10A
Built-in battery	times	≥1500 times(Acid battery)
Battery capacity:	pcs	2
Required charge time:	hours	8~10
Rated working time:	hours	8
machine dimation:	mm	(L)1542*(W)1231*(H)2785
Power supply voltage:	V	1PH 220 AC,50Hz
Power:	kw	0.95
Machine weight:	kg	430
Reel film size	mm	500*250
Internal diameter (d):	mm	Ø76
Film thickness	um	20~25